

## The New Method of Juice Concentration

Michael Soikhedbrod\*

Electromagnetic Impulse Inc., 21 Four Winds Drive, Unit 12, North York, Ontario, Canada

### Abstract

At present time, the concentrates of juice produce by the separation of the water from fresh juice. For producing of the concentrates of juice is used one of the following methods: the evaporation either the freezing water or the diaphragm method. The evaporation, when juice is heated in the vacuum in the special trays, but this heat is not led to the boiling point, since during the process of boiling all useful substances will be destroyed. The mass, obtained after evaporation, is similar to more viscous the jam, the honey or the thick syrup. The process of freezing completely repeats evaporation, with exception of temperature parameters. The water is moved away under the action of cold.

The diaphragm method, when the juices pass through the membrane with the smallest membrane's holes. The water infiltrates, and the large molecules of other substances of juice remain. All these methods are connected with the high expenditures. The paper represents the use of a new developed method for producing of the concentrate of the juice, where the water was not moved away, but the water by itself provides the producing of the high concentrate of juice.

**Keywords:** Separation; Concentrates of juice; Manyphase systems; Electric field influence on the water solutions; Hydrogen electrolysis gas bubbles

### Introduction

At present time, the concentrated juice produces by the separation of the water from fresh juice. For producing of the concentrated juice is used one of the following methods: the evaporation either the freezing water or the diaphragm method. The evaporation, when juice is heated in the vacuum in the special trays, but this heat is not led to the boiling point, since during the boiling all useful substances will be destroyed [1]. The mass, obtained after evaporation, is similar to more viscous the jam, the honey or the thick syrup. The process of freezing completely repeats evaporation, with exception of temperature parameters. The water is moved away under the action of cold [2].

The diaphragm method, when the juices pass through the membrane with the smallest membrane's holes. The water infiltrates, and the large molecules of other substances of juice remain [1].

All these methods are connected with the high expenditures.

In [3] a new method of separation of the smallest solid particles from the water solutions and of the collection of these particles as high concentrate in the special receiver was represented. The developed method permitted to produce the concentration of the smallest particles by such manner that the water was not moved away, but the water by itself provides the collection (concentration) of these particles. The paper demonstrates the use of the developed method for the fast and profitable concentration of juice. Besides, the use of developed method showed the high efficiency of the purification of waste water of the juice producing technologies.

### Materials

The method has been tested at the plant *Ganir* (Israel). The different juices productions of this plant: orange, apples, and mango, were used.

### Method and developed devices

The fresh juice with all important components inside presents the water that compounds the valuable microscopic particles of sucrose, sugar and acid. Therefore, the primary task of juice concentration reduced to the separation of the microscopic of these components

from the fresh juice and collection their high concentrate in the special receiver. The completely new technological process of juice concentration, which uses the action of DC (direct current) on the fresh juice, was developed [3]. Under the action of electric field on the fresh juice, the negatively charged bubbles of hydrogen are formed on the cathode. The size of formed negatively charged hydrogen bubbles can be controlled and can be as small, as this requires the technological process of juice concentration.

The use of negatively charged with calculated dispersiveness of hydrogen bubbles permits to solve the primary task of the technological process of juice concentration, connected to the separation of microscopic particles from fresh juice, -the creation of strong complex of the hydrogen bubbles + valuable microscopic particles of the solid component of fresh juice in the process of the elementary act of floatation.

After formation and detachment from the surface of cathode, the charged negatively bubbles of hydrogen, rising up in the juice; meet on its way the microscopic particles of the valuable solid component of the juice by the dimensions of considerably larger than single bubble and bubbles induce the positive charge on the area of the microscopic particle of solid material.

As a result of the attraction of opposite charges, the bubbles stick to the microscopic particle, forming strong contact, and volume of formed complex of microscopic particles + hydrogen bubbles strongly increases, and under the action of the considerably increased Archimedes force, the complexes of microscopic particles + hydrogen bubbles with the increased speed float upward. For conducting of the developed method of juice concentration, the special laboratory

\*Corresponding author: Michael Soikhedbrod, Electromagnetic Impulse Inc., 21 Four Winds Drive, Unit 12, North York, Ontario, Canada, Tel: 6509065; Fax: 6509065; E-mail: [mshoikh@primus.ca](mailto:mshoikh@primus.ca)

Received April 10, 2018; Accepted May 14, 2018; Published May 19, 2018

Citation: Soikhedbrod M (2018) The New Method of Juice Concentration. J Food Process Technol 9: 731. doi: [10.4172/2157-7110.1000731](https://doi.org/10.4172/2157-7110.1000731)

Copyright: © 2018 Soikhedbrod M. This is an open-access article distributed under the terms of the Creative Commons Attribution License, which permits unrestricted use, distribution, and reproduction in any medium, provided the original author and source are credited.

electroflotator was developed, whose common form is presented on the Figure 1.

The special laboratory electroflotator presents the cylindrical container from the organic glass with inside diameter of 2.0 cm, by height 11 cm, whose bottom (with square  $S=3.8\text{cm}^2$ ) is made from the stainless steel and serves as the cathode. The anode, made in the form of ring from the stainless steel, was fixed at a distance by 5 mm from the cathode.

Electroflotator was supplied by the manual separator in the upper part of electroflotator for the collection of the juice concentrate, obtained during the process of the fresh juice concentration, in the receiver collector.

The volume, which fills electroflotator by fresh juice, was about  $40\text{ cm}^3$ . Thus, the construction of electroflotator of this form is electroflotator of discrete action. The tests were conducted in the discrete, discontinuous regime. The fresh juice, in the process of juice concentration, was filled from top of the electroflotator.

During the process of the test, the juice concentrate, using manual separator, was collected in the receiver collector, and remained juice water was derived through the pin valve of electroflotator, located on the bottom of electroflotator. For the realization of juice concentration of continuous action, the following electroflotator was constructed (Figure 2).

Structurally developed electroflotator of continuous action for the juice concentration has floatation camera -7, fulfilled in the form of the rectangular capacity, whose angles are supplied by the special inserts, in consequence of which, the internal part of the camera acquires the



Figure 1: The common form of laboratory electroflotator.

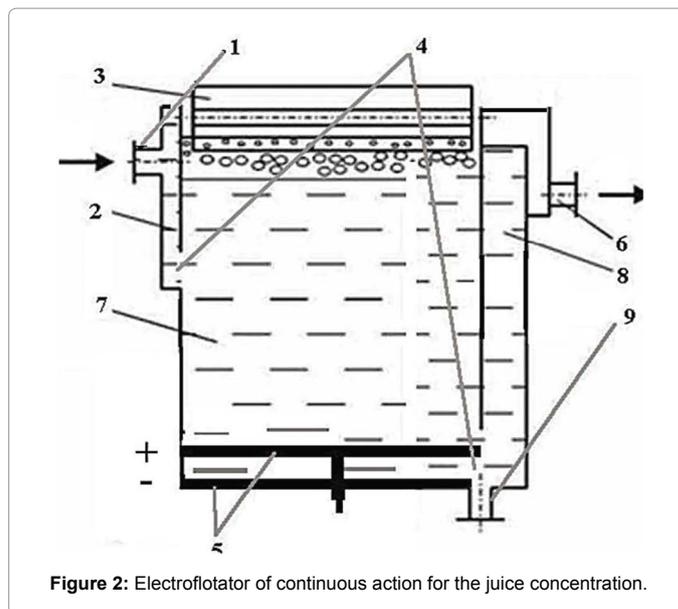


Figure 2: Electroflotator of continuous action for the juice concentration.

form of cylinder, and rear upper wall is supplied by the reflector. In the process of juice concentration, the fresh juice is entered to the floatation camera -7 through the branch pipe with crane 1, pocket 2 and gap 4, for the realization of separation of the valuable microscopic particles from the fresh juice.

The remained juice water, after passing through the camera -8 of additional cleaning, is moved away from electroflotator through the pocket and the drain branch pipe with crane-6. The basic element of electroflotator is electrolytic base -5, fulfilled in the form of plug and of special mechanism that permits simply to regulate by inter electrode gap size. The cathode was produced from the stainless and is mounted on the bottom of camera. The anode was produced from the corrosion-resistant metallic lattice uses the special construction, which is located on the cathode that simply regulates the size of gap between anode and cathode. After completion of works for washing of electroflotator and output of the entire remained water the branch pipe with crane -9 is provided. Crane, during the process of the work of electroflotator, is closed. The floated microscopic valuable solid particles of juice are collected in the foam layer in the upper part of the camera and are moved away by paddle device - 3 to the special receiver capsule.

## Results

The tests were conducted at the plant *Ganir* (Israel)). The tests were conducted on the special constructed laboratory electroflotator of discrete action (Figure 1). During the tests on the electrodes of electroflotator the direct current voltage was given. The operating range of direct current voltage composed 60-90v. The results of tests are represented in the Table 1 (I.R.D Laboratories).

U(v)	Brix	Ratio	Ascorbic acid, Mg/L	Pulp, %
60	64.0	17.5	11	5
75	65	18	11.2	8
90	65,5	19,2	11.4	10

The time of the process-18 seconds, Brix-measure for the mass relation the dissolved sucrose in the water to the liquid, Ratio- relationship sugar and acids in the concentrate.

Table 1: Results of the tests of the method of processing of the concentrates of juice in the electroflotator.

	<b>Brix</b>	<b>Pulp, %</b>	<b>COD, mg/l</b>
Before cleaning	0.4	2.5	7100
After cleaning	0.1	0	80

**COD** (Chemical oxygen demand)-determines a quantity of organic pollutants in the water.

**Table 2:** Results of the purification of waste water of the plant *Ganir*.

It can be seen from the Table 1 that the greatest results in the obtaining of the high-quality concentrates of juice are achieved by direct current voltage on the electrodes of 90v. It should be noted that obtained concentrate is the concentrated foam of juice that can be used for producing of the hydrogen cocktail with different juice fruit additives. For determination of the changes of the parameters of concentrate, shown in the Table 1, it was decided to use the developed method for the purification of waste water, obtained after general technological process at the plant.

Table 2 presents the results of purification of waste water, obtained after the completion of general technological process at the plant *Ganir* (I.R.D laboratories). It can be seen from the Table 2 that Brix decreased from 0.4 to 0.1, and pulp from 2.5% to 0. The decrease of these parameters is explained by an increase of their content in the juice concentrate after the cleaning. It should be focused attention on the parameter COD, which is the basic index of the pollution of water by organic matter. As follows from Table 2 that after cleaning,

the COD decreased from 7100 mg/l to 80 mg/l, which indicates of the high efficiency of the application of the developed method for the purification of waste water of this plant.

## Conclusion

Thus, the tests of the developed method of processing of the concentrates of juices showed its high efficiency for producing of the high-quality concentrates. Method is simple, fast and economically advantageous (it does not require the application of evaporation, freezing and membranes). The developed method showed the high efficiency of the purification of waste water of the juice producing technologies.

The developed electroflotators permit to produce the high-quality concentrates of juices and to clean of waste water with high efficiency in industrial practice.

## References

1. Alvesl VD, Coelho M (2006) Orange juice concentration by osmotic evaporation and membrane distillation: A comparative study. J Food Eng 74: 125-133.
2. Auleda JM, Raventos M (2011) Estimation of the freezing point of concentrated fruit juices for application in freeze concentration. J Food Eng 105: 289-294.
3. Shoikhedbrod MP (2017) Behavior of water under the influence of vibration and electric field. Lambert Academic Publishing, Toronto.