

Comparative Studies on Biodiesels Produced from Various Edible Oils

Rajaram Vijayaram^{1*}, M.Keerthana¹, R.Sowmiya¹

¹Kalasalingam Academy of Research & Education, India


ABSTRACT

Energy is the key source of input to drive and improve the life cycle. The finiteness of fossil fuel has increased the demand for other sources. Biodiesels are promising alternative fuel and they are renewable. It has gained attention due to the smallness of fuels and environmental concern. The usage of liquid fuels prepared from used edible oil by Trans esterification process is one of the alternate methods for the use of fossil fuels. The recent focus relies on using used edible oil for producing biodiesel.

Keywords: Biodiesel, Transesterification, Used Edible Oil, Properties analysis & comparison

INTRODUCTION

As population continues to increase, meeting the various energy needs such as domestic, industrial and transportation demands has become an increasing concern for policy makers and governments. The economics of industrial societies is based on consumption of geological oil. These oils supplies are substantially concentrated in areas of political instability. It is expected that oil prices will increase significantly in day to day life. Biodiesel is usually produced from the vegetable oil or animal fat with short chain alcohol such as methanol or ethanol. Its use in diesel based vehicle has shown reductions in Pollutants. Burning of vegetable oil based fuel does not give net atmospheric CO₂ level.

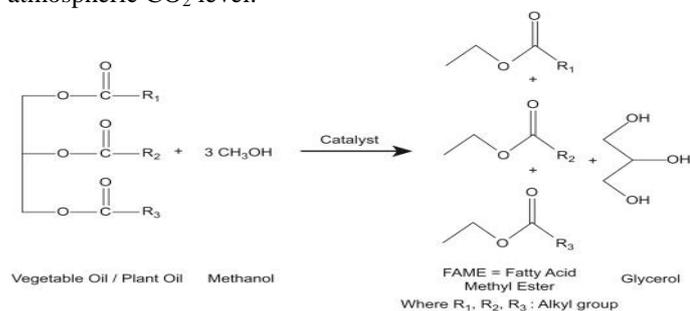

This is the reaction to make our own biodiesel fuel from used cooking oil. We need is common chemicals and some equipments. The result is a cheap and clean burning, non-toxic diesel motor fuel.


MATERIAL NEEDED

Waste vegetable oil (WVO), Methanol (CH₃OH), Hydroxide pellets.

PROPERTIES OF EDIBLE OIL

PROPERTY	UNITS	VALUE
DENSITY	g/cm ³	0.91-0.924
KINEMATIC VISCOSITY	mm ² /s	36.4-42
SAPONIFICATION VALUE	mgKOH/g	188.2-207
ACID VALUE	mgKOH/g	1.32-3.6
IODINE NUMBER	gI ₂ /100g	83-141.5

PRODUCTION OF BIOFUEL FROM USED EDIBLE OIL

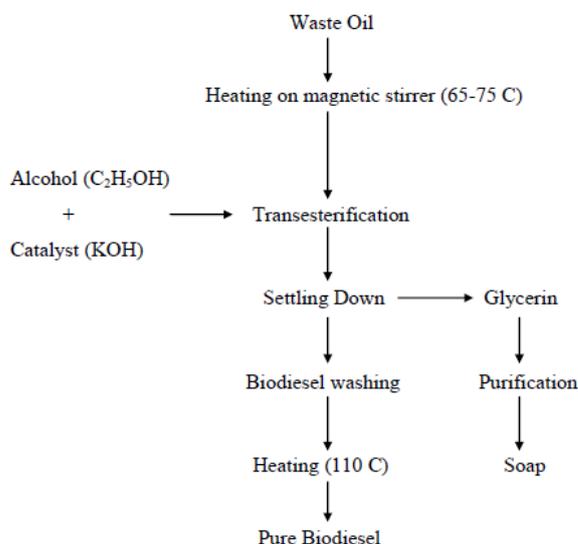

RESULTS & DISCUSSION

Properties of Bio-Diesel prepared from Various Edible Oils.

PROPERTIES	Diesel	Mahua Oil	Rice Bran Oil	Jatropha oil	Sunflower oil	Used Sunflower oil
Density (kg/m ³)	860	875	869	869	872	845.7
Flash point (°C)	65	170	175	165	166	164
Specific gravity	0.86	0.875	0.869	0.869	0.872	0.845
Fire point °c	72	178	178	172	177	174
Calorific value (kcal/kg)	11164.8	10844	11185.4	11164.8	10844	10660

Biodiesel has been prepared from various edible oils and it is found that it resembles the properties of commercial diesel produced from crude oil. The calorific values of the biodiesel are found within the range as per ASTM data. The Biodiesel from rice bran has the higher value of calorific value next to that of Jatropha oil.

CONCLUSION

Biodiesel generated from oil has a potential to become fuel of the future, of our country and it will not only provide employment opportunities in rural areas but also it provide an energy security, cleaner air and saving foreign exchange of our country. A variety of programs and solutions has been suggested to help alleviative energy needs. since non renewable energy sources of energy are not going to last forever. The minimum reaction time required for maximum biodiesel yield was found to be 60 – 90 min. In the optimum conditions, the properties of bio diesel from rice bran oil, sunflower oil and used sunflower oil were compared. It has many properties similar to fossil fuel, which would allow modern diesel engines to use biodiesel without any major modifications to the engine, without any appreciable loss of engine performance.

REFERENCE

1. Bhaskara rao B.K.:"Modern Petroleum Refining Process," 4th ed., pp 138-150, publishingco. Pvt LTD. New Delhi, 2002.
2. Irwin H. Segal,:"biodiesel calculations":2nd ed., pp 123-135, John Willey & sonsPublishing; New York.
3. Journals of scientific & industrial research, volume 63, January 2004, pp 39-47.
4. Journals of scientific & industrial research, volume 63, January 2004, pp 913-918.
5. National Biodiesel board, 2005 [http:// www.nbb.org](http://www.nbb.org)
6. Journal of scientific& industrial research VOL 64 NOV 2005 PP 866-822.
7. Gupta, AK 1994, Investigation on Methyl esters of plant oil as alternate renewable fuel for compression ignition engines. UK published PhD thesis Dept of farm power machinery, PAU, Ludhiana.
8. Sims R.E.H 2001: Bioenergy & Renewable carbon Sink, Renewable energy, 22(1-3):31-7.